


SUGGESTED THREE-MOTOR INSTALLATION FOR FLEETSCALE "BISMARK"



Uses two channels of Tx and ACTION P40C Mixer to introduce differential motor speed automatically when a steering command is applied. Rudder servo and centre motor connections are "straight through" the P40 and are not affected by any degree of mixing.

2 CHANNEL TRANSMITTER

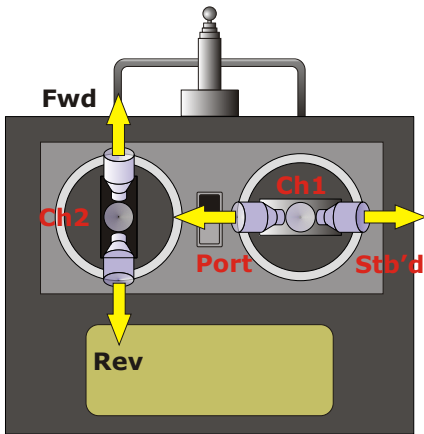